



Hydra



.....Caratteristiche tecniche.....

Smerigliatrice a nastro verticale per lavorazioni a umido

Motori a singola o doppia velocità IP55

Trasmissione a cinghia

Tendinastro con sviluppo fino a 2400x150 mm per lavorazione su rullo di contatto \varnothing 120 mm, piano o nastro libero

Distributore acqua a 2 rubinetti con diffusori a pettine

Vasca inox di raccolta fanghi a acqua

Apparecchiatura elettrica completa di comandi bassa tensione 24V


Ozioni: versione speciale per lavorazione a secco, pedaliera d'arresto

Hydra

Dati tecnici

modello	Potenza [kW]	Velocità [rpm]	Nastro [mm]	Rullo [mm]	Peso [Kg]
Hydra 2010	2,2	1500	1800x100	ø120x100	200
Hydra 2020	2,2/1,5	1500/1000	1800x100	ø120x100	216
Hydra 3010	2,2	1500	2400x150	ø120x150	260
Hydra 3020	2,2/1,5	1500/1000	2400x150	ø120x150	280

Hydra

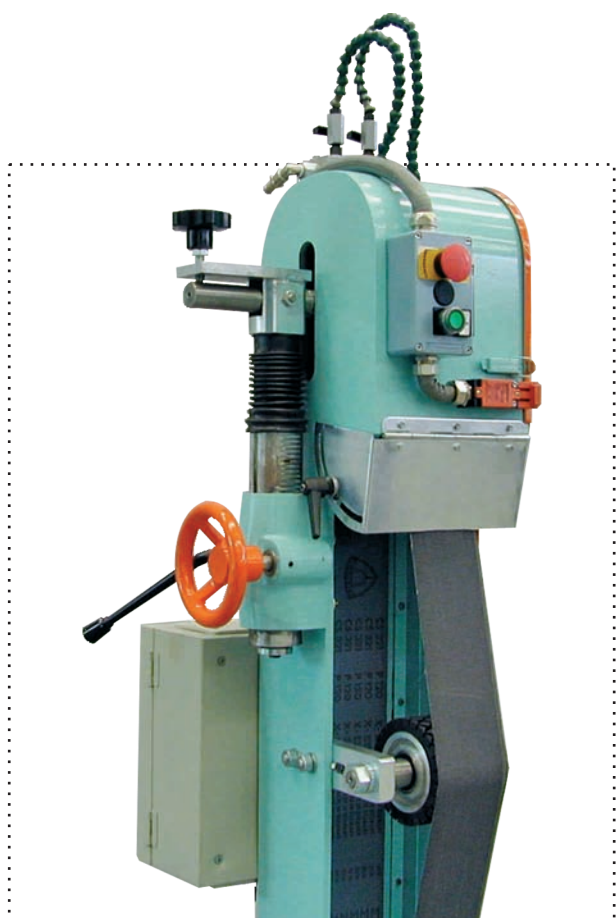

Lavorazione su rullo di contatto



Lavorazione su piano

Machines conforming to the essential safety and quality requirements provided by the Machinery Directive 2006/42/CE

Ciclope reserves the right to modify, at any time and without any notice, the dimensions and the execution of the articles listed in the present catalog.